

RUTLAND®

TRUSTED SINCE 1883



PREMIUM PRODUCTS FOR 140+ YEARS



HOME & HEARTH PRODUCT CATALOG



RUTLAND offers a comprehensive range of high-quality products for cleaning, maintaining, and repairing wood and gas stoves, fireplaces, hearths, and chimneys. Designed for both indoor and outdoor use, our premium portfolio is the gold standard for discerning customers and professionals alike—backed by more than 140 years of innovation and expertise.

CONTENTS

FIREPLACE & HEARTH	
FIRE STARTERS	5
RAINBOW FLAME® CRYSTALS	5
CREOSOTE & SOOT REMOVERS	6-8
ACCESSORIES, GLOVES, FANS	9
MAINTENANCE	
CLEANERS	10-11
CEMENTS & MORTARS	12-16
FIREBRICKS	17
GASKETS & INSULATION	18-21
PAINTS	22
HOME & CHIMNEY CARE	23
FIRE PREVENTION	23
SILICA SAND	23
POLISHES	24
SEALANTS	25
BRUSHES & RODS	
BRUSHES	27
RODS & ADAPTERS	28
INDEX	30

NEW ICONS

Look for these icons to easily identify RUTLAND's signature DIY categories & products, **CLEAN BY RUTLAND**, and our new **FINER FIRE COLLECTION™**.



FIREPLACE & HEARTH



FIRE STARTERS

SAFE LITE® FIRE STARTER SQUARES

Easy to light - even when wet - and burn up to 10 minutes per square! Only 1 - 2 squares are needed to start a fire. Simply break off 1 - 2 squares and set them on wood or pellets. Light by touching a flame to the rough edge of a square. These environmentally friendly, non-toxic squares are made of compressed recycled wood chips, paper fiber, and wax. Will not flavor food.



50B Carton of 144 Squares (8 per case)

50C Carton of 24 Squares (24 per case)

USE: BBQ, Grill, Smoker

ONE MATCH® FIRE STARTER GEL

A thick, odor-free, gelled fire starter for quickly and easily starting any fire! The best fire starter for pellet stove owners - mix gel with pellets and ignite! Will not flavor food.



48 8 fl oz Bottle (12 per case)

49 16 fl oz Bottle (12 per case)

49Q 32 fl oz Bottle (12 per case)

USE: BBQ, Grill, Smoker

SAFE LITE® 2X JUMBO FIRE STARTERS

RUTLAND's Jumbo Fire Starters are the best to start a fire in the toughest conditions. 20 minute burn time. No flare ups.

50J (9 per case)

USE: Fireplace, Wood Stove, Pellet Stove, Fire Pit, Grill

BBQ FIRE STARTERS

Made with vegetable wax. Lightweight and portable. Burns up to 10 minutes. 100% natural materials.

50W (9 per case)

USE: Fireplace, Wood Stove, Pellet Stove, Fire Pit, Grill

RAINBOW FLAME® CRYSTALS

RAINBOW FLAME® CRYSTALS

A family favorite - enjoy beautiful blue and green flames! Simply shake 1/2 cup, or toss the whole packet, onto a bed of hot coals. Not for use in gas units or in fires that will be used to prepare food.

715 1 lb Canister (12 per case)

715P Craft Paper Toss-in Packets (25 packets per case)

71599 XL 2.5 lb Canister (6 per case)

USE: Fireplace, Fire Pit, Wood Stove

WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



CREOSOTE & SOOT REMOVERS



CREOSOTE ANTIDOTE®
Helps prevent dangerous creosote buildup in wood stoves and fireplaces
Made with 100% recycled hardwood and powered by RUTLAND’s refined creosote concentrate formulation.

98A 6 lb Box (2 per box)

USE: Fireplace, Wood Stove



CREOSOTE REMOVER
Keeps creosote build-up at bay! Add 1-2 scoops to a fire once per week or more often as needed. Safe for use in all chimneys and wood-burning appliances. Will not damage catalytic converters.

97 1 lb Tub (12 per case)
98 2 lb Tub (6 per case)

USE: Fireplace, Wood Stove



PELLET STOVE CREOSOTE REMOVER
Helps prevent dangerous creosote buildup in pellet stoves, wood stoves, and fireplaces. Concentrated creosote removing formula combined with high quality wood pellets dried to 2-5% moisture content.
Recommended usage 2x/week

98P 8 oz Box (12 per case)
98P03 3 lb Bag (5 per case)
98P05 5 lb Bag (4 per case)

USE: Pellet Stove, Fireplace, Wood Stove



WARNING: These products can expose you to harmful chemicals.
For more information, go to www.P65Warnings.ca.gov.

CREOSOTE & SOOT REMOVERS

LIQUID CREOSOTE REMOVER
Great for all stove and flue types, but best for pellet stoves where granules fall through the burner pan. Spray on an existing fire or pre-treat fuel before adding to a fire to make a chimney safer and more efficient.

97L 32 fl oz Spray Bottle (6 per case)

USE: Fireplace, Wood Stove, Pellet Stove



LOG BRIGHT® GAS LOG SOOT REMOVER
Spray on gas fireplace logs to safely remove and control future soot buildup, giving them a “like new” appearance. Easy to use, this spray-on cleaner does not require scrubbing or wiping off. Use on vented and vent-free liquid propane and natural gas units. Will not discolor ceramic logs or harm burners. Do not use on white birch or fiber logs.

570-6 16 fl oz Spray Bottle (6 per case)

USE: Gas Fireplace



SOOT SWEEP® SOOT DESTROYER®
Controls soot build-up in fireplaces, wood or coal stoves, furnaces, and boilers. Add 1-2 scoops to a fire once per week or more often as needed.

100 1 lb Tub (12 per case)
100B 2 lb Tub (6 per case)

USE: Fireplace, Wood Stove



CREOSOTE CONCENTRATE
RUTLAND’S powerful creosote remover in a convenient and economical tub. Two scoops per treatment.

19701 1 lb (12 per case)
19702 2 lb (6 per case)

USE: Fireplace, Wood Stove



WARNING: These products can expose you to harmful chemicals.
For more information, go to www.P65Warnings.ca.gov.

MAINTENANCE



CLEANERS



FIREPLACE & WOOD STOVE GLASS CLEANER

Formulated to remove smoke, soot, and creosote residue from glass doors of fireplaces and wood stoves. Spray-on cleaner does not contain dangerous acids or ammonia. Just spray on and wipe off – it's that easy! In no time at all, fireplace or stove glass will have that "like-new" appearance for continued enjoyment of leisure fires.

82 32 fl oz Spray Bottle (6 per case)



CLEAR GLASS STOVE, GRILL & HEARTH CONDITIONING GLASS CLEANER

Non-scratching formula consisting of micro-scrubbers that remove baked-on soot, creosote, carbon, and other mineral residues from glass doors of fireplace inserts, and coal-, oil-, and wood-burning stoves and pellet stoves. Ammonia-free. Leaves behind a protective silicone layer to make future cleanings even easier!

84 8 fl oz Bottle (12 per case)



WHITE-OFF® GLASS CLEANING CREAM

Specially formulated for the removal of white residue on gas log fireplace glass doors. Non-abrasive and easy to use, this glass cleaning cream does not scratch or cause micropitting. Ammonia-free.

565 8 fl oz Bottle (12 per case)



BRICK & STONE CLEANER

Removes stubborn creosote or soot build-up on bricks or stone surrounding a fireplace. Industrial strength solvent will penetrate and dissolve build-up on most any stone or sealed brick without use of dangerous acids. Can also be used on an asphalt roof to remove chimney smoke and grime.

83-6 16 fl oz Spray Bottle (6 per case)



TSP CLEAN & PREP®

Heavy-duty indoor, outdoor cleaner & degreaser. Cleans and prepares surfaces for painting by allowing for superior adhesion. Great for woodwork, walls, decking, siding, and concrete & masonry. Helps fight mold & mildew, removes heavy deposits of grease & grime, smoke, soot stains, and chalked paint. Use to clean lead-contaminated dust from surfaces. Can be combined with bleach for an even stronger solution. Use phosphate-free product in areas where use of phosphate is strictly regulated. For heavy duty indoor cleaning, dissolve 2 scoops in 1 gallon of hot water.

CLTSP01 Technical-grade Trisodium Phosphate
16 oz. bag (15 per case)

CLTS01 Phosphate-free for heavier outdoor use
16 oz. bag (15 per case)

USE: Woodwork, Wall, Decking, Siding, Concrete & Masonry



JUST GRATE®

Grill grate and BBQ cleaner makes cleaning your grill easy. The powerful formula quickly gets rid of caked on food, carbon, grease, and baked on deposits that can ruin the taste of your favorite foods. Fresh citrus scent.

462 16 oz bottle (6 per case)

USE: Grill Grate & BBQ



WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



CEMENTS & MORTARS

NAME	TYPE	MASONRY/METAL	USE	RATING (F)	LAYER*
FIREPLACE MORTAR (63, 63B, 63G)	HEAT CURE	MASONRY	INDOOR	2000°	1/8" - 1/4"
BLACK FURNACE CEMENT (64A, 64C, 64, 65)	HEAT CURE	BOTH	INDOOR	2000°	UP TO 1/8"
STOVE & GASKET CEMENT (77, 78)	AIR DRY	BOTH	INDOOR	2000°	UP TO 1/8"
FIBERGLASS GASKET CEMENT (77E, 78E)	AIR DRY	BOTH	INDOOR	2000°	UP TO 1/8"
HEAT TRAPPER INSULATIVE (10501)	AIR DRY	MASONRY	BOTH	2200°	1/2" - 9"
DRY MIX 211 (211, 21125)	AIR DRY	MASONRY	BOTH	2550°	1/16" - 1"
CASTABLE REFRACTORY CEMENT (600, 601)	AIR DRY	MASONRY	BOTH	2200°	1/2" - 9"
REFRACTORY CEMENT (610, 611)	HEAT CURE	MASONRY	INDOOR	2000°	UP TO 1/4"

HEAT CURE: Allow to air-dry for 24 hours. Burn a low ~250°F fire for about 2 hours, then build the fire up to ~500°F for an additional hour. Learn more about heat curing and watch demonstrations:



Scan to view our Cements & Mortars Minute Clinic.



E-Z SPREAD FIBERGLASS STOVE GASKET CEMENT

Designed to be the easiest gasket cement for affixing fiberglass gaskets to steel and cast iron. Very easy to spread and control application and will not expand or contract during continued use. Apply in beads of 1/8" or less. 2000°F temperature rating. New and improved, no longer requires heat cure. Black.

- 77E 2.3 fl oz Tube (12 per case)
- 78E 10.3 fl oz Cartridge (12 per case)



USE: Fireplace, Wood Stove, Outdoor Sheltered



STOVE & GASKET CEMENT - THE ORIGINAL

This cement pulls double duty because not only can this cement adhere any fiberglass gasket to most any metal, it can also be used to fix those small cracks, pinholes, and leaks in a cast iron stove. Available in a handy squeeze tube or in a larger caulk gun-ready size, this cement will help restore a stove to safe and efficient operation. Apply in beads of 1/8" or less. 2000°F temperature rating. Black.

- 77 2.3 fl oz Tube (12 per case)
- 78 10.3 fl oz Cartridge (12 per case)



USE: Fireplace, Wood Stove, Outdoor Sheltered



REFRACTORY CEMENT

An ideal high-heat cement for masonry joints 1/4" or less. Pre-mixed, easy to trowel, and fiber reinforced, this cement can be used to set, bond, and repair cracked or broken firebricks in stoves, fireplaces, and furnaces as well as for building fireplace boxes. Its thick, smooth consistency makes this cement perfect for use as mortar between firebricks. Meets ASTM E136-04. 2000°F temperature rating. Requires heat cure. Buff.

- 610 64 fl oz Tub (6 per case)
- 611 128 fl oz Pail (2 per case)

Heat Cure Required



USE: Fireplace, Wood Stove, Outdoor Sheltered



WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



CASTABLE REFRACTORY CEMENT

An exceptionally strong dry-mix cement that chemically sets and dries as hard as brick. Just add water! Perfect for casting into custom designs because it holds its shape while drying. Can even be used as the sole material when casting a solid stove bed or outdoor oven. 2200°F temperature rating. Does not require heat cure! Cast up to 9" depth. Color may vary.

- 600

12.5 lb Pail (2 per case)
- 601

25 lb Pail (1 per case)
- 

USE: Fireplace, Wood Stove, Pellet Stove



FURNACE CEMENT

Premixed and ready to use, this is one of the easiest cements to apply. Use this smooth consistency cement to bond and seal metal to metal or metal to masonry joints less than 1/8". Repair a crack, seal the collar to the top of a wood stove, or seal between firebricks and prefabricated fireplace. Use anywhere a quality high-temperature adhesive is required for furnaces, firebrick repair, filling gaps, sealing joints, or gluing ceramic logs. Adheres to metal, stone, and firebricks, creating a permanent smoke- and gas-tight seal. 2000°F temperature rating. Heat cure required.

- 64A

8 fl oz Tub (12 per case)
- 64C

10.3 fl oz Cartridge (12 per case)
- 64

16 fl oz Tub (12 per case)
- 65

32 fl oz Tub (6 per case)

USE: Fireplace, Wood Stove, Outdoor Sheltered



FIREPLACE MORTAR

Perfect for repairing small chips or cracked firebrick, re-pointing mortar joints between firebricks, and bonding firebricks together. Adheres masonry to masonry for brick, firebrick, and stone. Use for cracks 1/8" deep or less. If deeper, apply multiple layers of ~1/8" and allow 24 hours to dry between layers. Easy to apply with a caulking gun and will last for years. Sets as hard and as strong as firebrick after curing and can withstand the high temperatures produced by a wood fire. 2000°F temperature rating. Requires heat cure.

- 63

Black

10.3 fl oz Cartridge (12 per case)
- 63B

Buff

10.3 fl oz Cartridge (12 per case)
- 63G

Gray

10.3 fl oz Cartridge (12 per case)
-  Heat Cure Required
- 

USE: Fireplace, Wood Stove, Outdoor Sheltered



DRY MIX 211®

A refractory mortar ideal for joining or repairing masonry flue tile in any gas or wood fireplace and wood, coal, or pellet stove chimney. Just add water, mix, and trowel into place. It can also be used as a parge coating when building or replacing fireboxes. Meets NFPA 211 Standards and NYSCMA Tek 4.0 Specifications. 2550°F temperature rating. Does not require heat cure. If applying in layers, do not exceed 1" per layer and allow 24 hours to dry between layers. Dark Gray.

- 211

10 lb Pail (4 per case)
- 21125

2.5 lb tub (6 per case)
- 

USE: Fireplace, Wood Stove, Pellet Stove, Gas Fireplace



NEW CONVENIENT SIZE!

FIREBRICK & MORTAR KIT

Kit includes 5 Firebox Bricks and 2 lb Dry Mix 211. Our Firebox Bricks are perfect for intermediate duty for building new fireplaces or to replace old or broken bricks in existing fixtures (wood or coal stoves, furnaces, and fireplace inserts). They can also be used to line a fire pit in the backyard or anywhere else a brick is needed that can withstand high temperatures. Bricks measure 9" x 4-1/2" x 1-1/4".

- KT603211

5 bricks, 2 lb mortar per case





HEAT TRAPPER

A high temperature, low-density cement that specializes in heat insulation for insulative appliances, such as pizza ovens, tandoor ovens, smokers & BBQs. While standard refractory cements radiate heat outward, Heat Trapper® will keep the heat inside the burn area. Perfect for repairing or constructing chimney flue and duct linings, or lightweight refractory panels. Adheres to masonry, terracotta, fire clay and fire bricks.

10501 12 lb tub (1 per case)



FIREBOX BRICKS

These firebricks can be used to build new fireplaces or to replace old or broken bricks in existing fixtures (wood or coal stoves, furnaces, and fireplace inserts). Color may vary. They can also be used to line a fire pit in the backyard or anywhere else a brick is needed. Meets or exceeds residential building codes regarding fireplace and chimney construction. Color may slightly vary. Not for direct food contact. Each brick measures 9” x 4.5” x 1.25”.

- 603-1 6 Bricks per case - Ivory
- 604-1 6 Bricks per case - Buff
- 10602 6 Bricks per case - Red



SOAP SPLIT FIRE BRICKS

Slender fire bricks half the size of typical fire bricks. Commonly used for decorative fireplace designs, such as herringbone or chevron designs, but can also be used to build or repair outdoor fire pits, pizza ovens and stove linings. Meets ASTM C-27 (Low Duty), C-1261 and the requirements of national & international building codes regarding fireplace and chimney construction. Color may slightly vary. Not for direct food contact. Each brick measures 9” x 2.25” x 1.25”.

- 16035 12 Bricks per case - Ivory
- 160250 12 Bricks per case - Red



SOAPSTONE FIRE BRICKS

RUTLAND’s Soapstone Fire Bricks provide a **food-safe** surface and are best-in-class for the absorption and retention of heat. Incredibly dense, heavy fire bricks that will easily withstand temperatures produced by any wood fires, radiating heat much longer than clay fire bricks. Featured in high-end pizza ovens and masonry heaters, soapstone adds a natural and unique beauty along with improved performance. The ideal fire brick for pizza ovens, but works great for fireplaces, surrounds, and outdoor BBQ pits. Each brick measures 9” x 4.5” x 1.25”.

- 16051 6 Bricks per case - Blue-gray
- Food-Safe Surface





FIBERGLASS INSULATION

An insulation strip with a peel-off, self-adhesive backing that is ideal for forming a smoke- and gas-tight seal between a fireplace insert and existing masonry. For the best performance, replace insulation every time the insert is removed for cleaning. Rated to 250°F.

105 10' Roll (6 per case)



GRAPHO-GLAS® STOVE GASKETS

Graphite impregnated, braided fiberglass gasketing engineered to provide superior sealing, protection, and longevity. Also resist abrasion, creosote and soot adhesion, and temperatures up to 1000°F. Used by major stove manufacturers and to replace worn-out gaskets in wood and coal stoves or fireplace inserts. Annual replacement of stove gaskets ensures a tight seal for maximum airtight operation and efficiency.

KITS (Includes Gasket & Fiberglass Stove Gasket Cement) (6 per case)

95A-6	7' x 5/16"	Rope
95-6	7' x 5/8" x 3/16"	Flat
95W-6	7' x 3/4" x 1/4"	Flat
96-6	7' x 3/8"	Rope
96N-6	7' x 1/2"	Rope
96W-6	7' x 5/8"	Rope
99-6	7' x 3/4"	Rope
99N-6	7' x 7/8"	Rope



Also available by the foot upon request.
Call 800-544-1307 for pricing.

BAGGED (Cement not included)

90	7' x 5/8" x 3/16"	Flat
91	7' x 3/8"	Rope
91N	7' x 1/4" - 5/16"	Rope
92	5' x 1/2" - 5/8"	Rope

92W	7' x 3/4"	Rope
94N	5'4" x 7/8"	Rope
94	6' x 1"	Rope

SPOOLS

720	157' x 5/8" x 3/16"	Flat
721	200' x 5/16"	Rope
721N	200' x 1/4"	Rope
722	132' x 3/8"	Rope
723	88' x 1/2"	Rope
723W	100' x 7/16"	Rope

724	65' x 5/8"	Rope
725	47' x 3/4"	Rope
725W	40' x 7/8"	Rope
726	25' x 1"	Rope
516GG	75' x 5/16"	Griddle Gasket

GASKET SPOOL DISPLAY

Holds 5-6 gasket spools with convenient measuring tape. Black.

108E 24" x 12"



STOVE WINDOW GASKETS

Designed to securely seal stove window glass in stove doors and openings. Peel off protective paper and wrap self-adhesive tape over the glass edge. No additional cement is needed. Available in black with graphite.

93	Black	4'6" x 11/16"	Bagged (12 per case)
727	Black	80' x 11/16"	Spoiled (1 per case)
729	Black	90' x 13/16"	Spoiled (1 per case)



Scan to view our video illustrating how to replace a stove door gasket.



WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



**PREMIUM SELF-ADHESIVE CERAMIC GRILL
REPLACEMENT GASKET**

Ceramic Grill and Smoker gasket replacement. Fits sizes XXL, XL, Large, Medium, Small and Mini. Premium gasket intended for Big Green Egg and similarly sized grills. Designed to comfortably endure 5+ clean burns at 700°F. High heat-resistant self-adhesive strip featuring 3M technology. White Fiberglass, longer lasting and more durable than Nomex and felt gasketing. Bonus gasketing included for replacing the chimney seal.

99N12 12' (15 per case)
99N17 17' (15 per case)



 Scan to view installation instructions.





HI-TEMP PAINTS

Provide both a beautiful flat black finish as well as durability to any stove or grill, and will look great for years while keeping rust at bay. Use outdoors or indoors. Adhere to steel, cast iron, aluminum, and brick, and are great for grills, stoves, smokers, stove pipes, fireplace inserts, furnaces, barbecues, mailboxes, lampposts, fireplace tools, brass, firebrick, and chimney caps. Flat Black.

PREMIUM 1400°F BRUSH-ON PAINT WITH LOW VOC

81V 16 fl oz Can (6 per case)

1200°F HI-TEMP PAINTS

80 12 fl oz Spray Can (12 per case)

81 16 fl oz Can* (6 per case)

10817 1 gallon Can* (2 per case)

**Products 81 and 10817 not for sale in California*



NEW GALLON SIZE!

WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



WATER GLASS CEMENT FLOOR SEALER

This unique formula is a multi-use sealant and adhesive. When diluted, it becomes an excellent stain-resistant concrete sealant against oils while simultaneously preventing concrete dust. Use full-strength for an effective and inexpensive adhesive for sealing gaskets, cartons, and applying labels.

146 1 gal Jug (4 per case)

USE: Outdoor Sheltered



FIRE PREVENTION

FIRE BLANKET

A tried-and-true solution to quickly, and easily extinguish small fires. RUTLAND's Fire Blanket is a woven fiberglass used to smother fires by depriving it of oxygen. The best solution for liquid or grease fires, but will work on ordinary combustible fires, like wood fires. Ensure proper fire safety and peace of mind by keeping one accessible in any cooking area, fire pit or fireplace, or vehicles. Unlike traditional fire spray extinguishers, fire blankets are easily stored and accessible, will never expire, and non-mechanical, so there's no potential of it breaking while it's stored away. RUTLAND's Fire Blanket is composed of strong woven fiberglass fabric, and features straps for quick and intuitive deployment. Each fire blanket measures 40" x 40".

10911 1-pack

19112 2-pack

19114 4-pack

12911 12-pack Clip Strip



SILICA SAND



SILICA SAND

Our Silica Sand is ideal for all gas burning fire pits and fireplaces (except liquid propane). This striking natural silica sand enhances the natural beauty of fire, while modernizing classic looks.

15810 13 lb pail (2 per case)

USE: Gas Burning Fire Pit, Gas Fireplace





STOVE POLISH *not for sale in California*
Transforms old, dull, cast iron stoves into like-new appearance! Combines three different waxes with some of the blackest pigments to renew and protect cast iron. Non-toxic and non-flammable, this polish can be buffed to a deep lustrous glow, leaving cast iron looking better than new. Prevents deterioration to the exteriors of stoves, grills, ornamental ironwork, and heating accessories even during extended storage. Not for use on painted, powder-coated, stainless, raw, or sandblasted steel. Black.

70 2.3 fl oz Tube (12 per case)



LIQUID STOVE & GRILL POLISH *not for sale in California*
Protects cast iron and steel heating and cooking appliances from getting dull and rusty. Apply polish and buff to a high luster to restore that like-new appearance. Safe to use – non-flammable and non-toxic. One bottle should lightly polish an average sized, free-standing wood stove or a large grill. Not for use on painted, powder-coated, sand-blasted, stainless, or raw steel surfaces. Black.

72 8 fl oz Bottle (12 per case)



WILLIAM'S® STOVE POLISH *not for sale in California*
Brings a low-luster, dark gray finish to any unpainted cast iron appliances. Easy to apply. Buff after drying. Can also be used on wood and coal stoves, barbecues, hibachis, iron pots, iron kettles, and grills. Not for use on painted, powder-coated, sand-blasted, stainless, or raw steel surfaces. Dark Gray.

WI-00710 2.3 fl oz Tube (12 per case)



SEAL IT RIGHT® FLEXIBLE LATEX SEALANT *not for sale in California*
A non-permanent seal that expands and contracts with heat variations. For use with metal and aluminum. Use to install and maintain direct vent appliances, gas-burning systems, pellet stoves, and metal flues on wood and coal stoves. Easily removed for cleaning and inspection. Not an adhesive. 800°F continuous temperature rating. Black. Does not require a heat cure.

641C 2.3 fl oz Tube (12 per case)
641 10.3 fl oz Cartridge (12 per case)



USE: Fireplace, Wood Stove, Pellet Stove, Gas Fireplace



HIGH HEAT SILICONE SEALANT
A great solution for sealant needs – seals off gases and smoke permanently, with limitless uses in the home or on job sites. Use to seal fireplace inserts, repair solar panels, or seal a chimney cap to withstand wind, rain, and hot smoke. Available in 600°F RTV and 500°F RTV temperature ratings and two colors (Red and Black) as well as Clear. Does not require a heat cure.

600°F RTV
600°F RTV temperature rating and available in Red and Black.

76R Red 10.3 fl oz Cartridge (12 per case)
76B Black 10.3 fl oz Cartridge (12 per case)



USE: Fireplace, Wood Stove, Pellet Stove, Gas Fireplace



500°F RTV
500°F RTV temperature rating and available in Black and Clear. Choose from a handy 2.7 fl oz tube for small repairs or a 10.3 fl oz caulk gun cartridge for larger jobs.

76* Black 10.3 fl oz Cartridge (12 per case)
76A* Black 2.7 fl oz Tube (12 per case)
76C* Clear 10.3 fl oz Cartridge (12 per case)



*Approved for food-zone areas. Meets FDA Reg 21, CFR 177.2600 and NSF 51.



BRUSHES & RODS

CHIMNEY SWEEP® BRUSHES



CHIMNEY SWEEP® WIRE CHIMNEY BRUSHES

Designed with the homeowner in mind, these brushes have an open, single spiral construction with 6" of fill, plated shafts, and 1/4" NPT threading for easy coupling with fiberglass rods or pull rings. Oil-tempered spring wire. Use in masonry and metal liners. Use in cool chimney only. Use with RUTLAND® Rods 10624, 10672, and KRK-18 on page 24.



Tip: Be sure to match the fitting of brushes and rods (NPT - NPT or 1/4-20 - 1/4-20). Use a **RUTLAND Reducer** to allow the use of mismatched brushes and rods!

ROUND WIRE

16406	6"	Round (4 per case)
16407	7"	Round (4 per case)
16408	8"	Round (4 per case)
16409	9"	Round (1 per case)
16410	10"	Round (1 per case)

SQUARE WIRE

16506	6"	Square (4 per case)
16507	7"	Square (4 per case)
16508	8"	Square (4 per case)
16510	10"	Square (1 per case)
16511	11"	Square (1 per case)
16512	12"	Square (1 per case)

RECTANGULAR WIRE

36531	6" x 10"	Rectangular (1 per case)
16532	7" x 11"	Rectangular (1 per case)
16533	8" x 12"	Rectangular (1 per case)

CHIMNEY SWEEP® ROUND POLY CHIMNEY BRUSHES

Specially designed for stainless steel, liners, and stove pipes. These sturdy poly brushes have 6" of fill and are acid resistant. Fittings are 1/4" NPT threading. Use in masonry and metal liners. Use in cool chimney only. Use with RUTLAND® Rods 10624, 10672, and KRK-18 on page 24.

16906	6"	Round Poly (4 per case)
16908	8"	Round Poly (4 per case)

CHIMNEY SWEEP® PELLET STOVE & DRYER VENT BRUSHES

Designed to clean both pellet stove vents and dryer vents. Brushes can easily navigate a sharp turning radius without getting caught in elbows. Brush filament is 0.020" poly. For light cleaning only. For heavier buildups, use RUTLAND® Pellet Stove Brushes PS-3, PS-4, or PS-5, shown below.

17409	3"	Brush with 10' Flexible Handle (4 per case)
17410	4"	Brush with 10' Flexible Handle (4 per case)
17419	3"	Brush with 20' Flexible Handle (4 per case)
17420	4"	Brush with 20' Flexible Handle (4 per case)

CHIMNEY SWEEP® PELLET STOVE BRUSHES

Made with poly bristles and available in 3", 4", and 5" round sizes. Heavy-duty ball tip guides brushes through narrow offsets and bends. Designed for heavy cleaning. Fittings are 1/4-20 thread. Use with RUTLAND® Rods 25P-5 and PSR-20 on page 24.

PS-3	3"	Round Poly (4 per case)
PS-4	4"	Round Poly (4 per case)
PS-5	5"	Round Poly (1 per case)



WARNING: These products can expose you to harmful chemicals. For more information, go to www.P65Warnings.ca.gov.



FIBERGLASS CHIMNEY BRUSH EXTENSION RODS

Designed with the DIY homeowner in mind. Rods are available individually in lengths of 4' and 6' and use 1/4" NPT threading to connect to a chimney brush. Attach to a RUTLAND® Chimney Sweep® Wire or Poly Brush to clean a chimney from the top down or up through the open fireplace. The fiberglass is flexible enough to handle slight offsets, but not enough to bend around sharp corners. Cleaning in an up-and-down motion with these rods will provide the power necessary for a satisfactory result.

10624	4'	Individual Rod	Bends <90° (24 per case)
10672	6'	Individual Rod	Bends 90° (24 per case)
KRK-18	18'	Kit (Six 3' Rods)	Bends 45° (5 per case)



FLEXIBLE POLY PELLET STOVE RODS

Poly rods designed to easily maneuver through 30° and 45° offsets, 0.250" diameter and 1/4-20 thread. Use with RUTLAND® Chimney Sweep® Pellet Stove Brushes.

25P-5	5'	Individual Rod	Bends 360° (10 per case)
PSR-20	20'	Kit (Eight 2.5' Rods)	Bends 360° (5 per case)



PRODUCT #	PAGE #	PRODUCT #	PAGE #	PRODUCT #	PAGE #
50B	5	64	14	81	22
50C	5	65	14	10817	22
48	5	63	15	146	23
49	5	63B	15	10911	23
49Q	5	63G	15	19112	23
50J	5	211	15	19114	23
50W	5	21125	15	12911	23
715	5	KT603211	15	15810	23
715P	5	10501	16	70	24
71599	5	603-1	17	72	24
98A	6	604-1	17	WI-00710	24
97	6	10602	17	641C	25
98	6	16035	17	641	25
98P	6	160250	17	76R	25
98P03	6	16051	17	76B	25
98P05	6	105	18	76	25
97L	7	95A-6	19	76A	25
570-6	7	95-6	19	76C	25
100	7	95W-6	19	16406	27
100B	7	96-6	19	16407	27
19701	7	96N-6	19	16408	27
19702	7	96W-6	19	16408	27
97C5	8	99-6	19	16410	27
97C20	8	99N-6	19	16506	27
97G	8	90	19	16507	27
100G	8	91	19	16508	27
701-6	9	91N	19	16510	27
702	9	92	19	16511	27
FN05	9	720	19	16512	27
82	10	721	19	36531	27
84	11	721N	19	16532	27
565	11	722	19	16533	27
83-6	11	723	19	16906	27
CLTSP01	11	723W	19	16908	27
CLTS01	11	724	19	17409	27
462	11	725	19	17410	27
77E	13	725W	19	17419	27
78E	13	726	19	17420	27
77	13	516GG	19	PS-3	27
78	13	108E	19	PS-4	27
610	13	93	19	PS-5	27
611	13	727	19	10624	28
600	14	729	19	10672	28
601	14	99N12	21	KRK-18	28
64A	14	99N17	21	25P-5	28
64C	14	81V	22	PSR-20	28
		80	22		




RUTLAND®

TRUSTED SINCE 1883

CONTACT RUTLAND CUSTOMER SERVICE
TO SPEAK WITH ONE OF OUR EXPERIENCED PROFESSIONALS!

800.544.1307 . 802.775.5519 . Fax 802.775.5262 . sales@rutland.com . rutland.com
7 Crabtree Road . Jacksonville, IL 62650

Copyright © RUTLAND
RC-2320

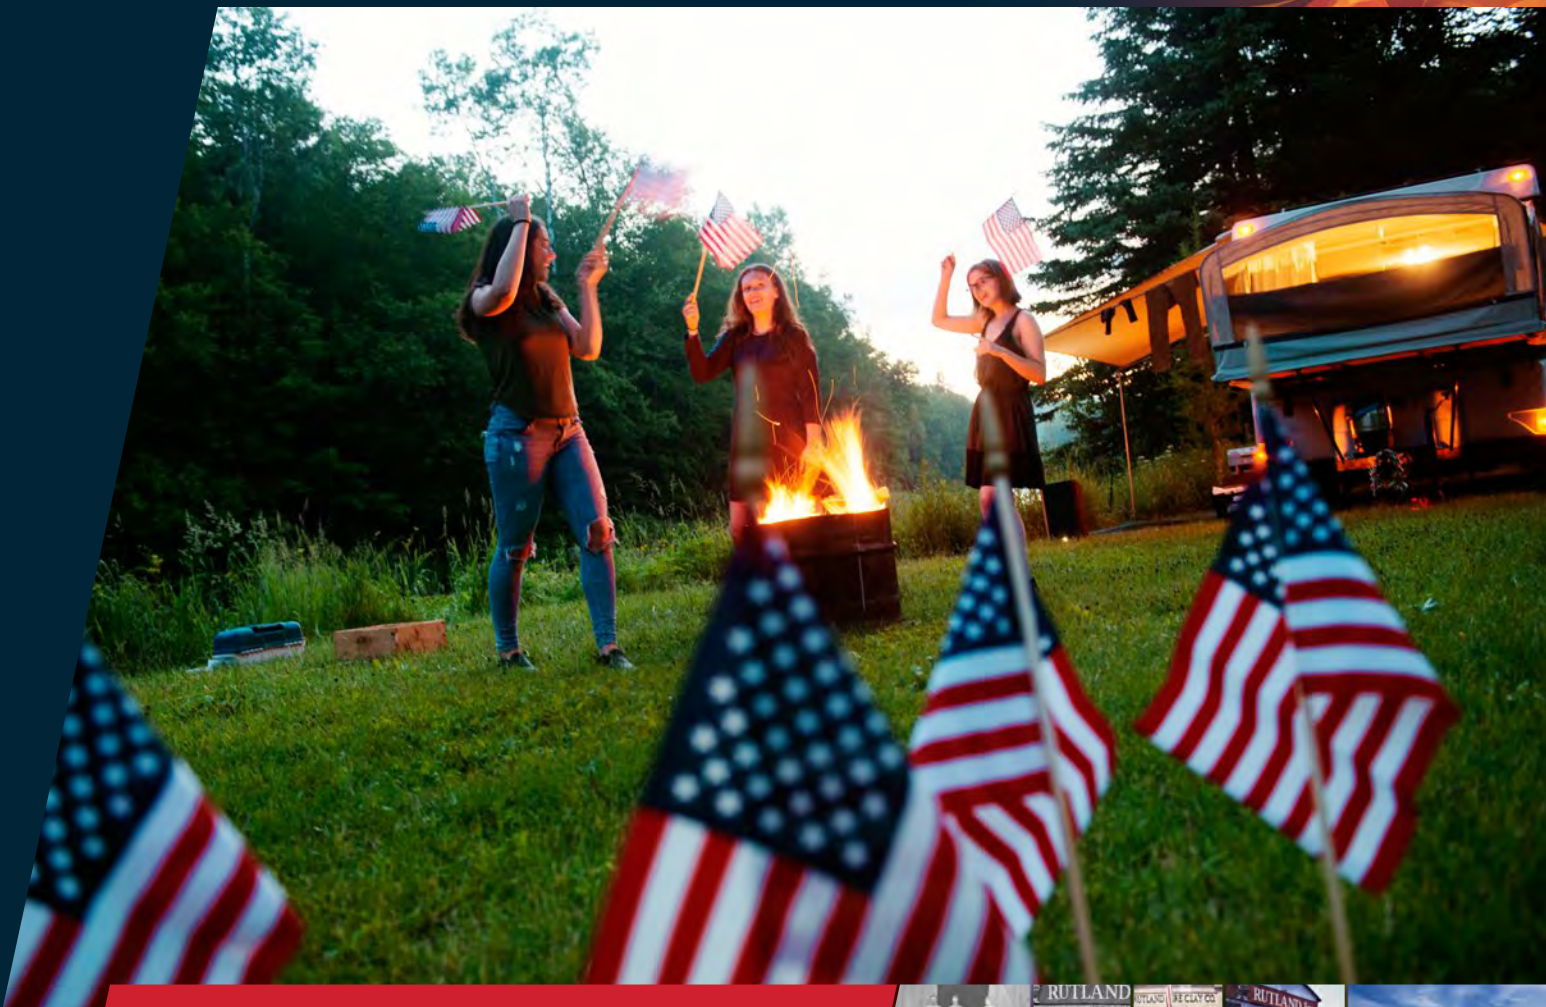

CONNECT WITH US!   [@RUTLANDPRODUCTS](https://twitter.com/RUTLANDPRODUCTS)



CHECK OUT OUR RUTLAND PRODUCTS YOUTUBE
CHANNEL FOR PRODUCT AND HOW-TO VIDEOS!

